

1/3

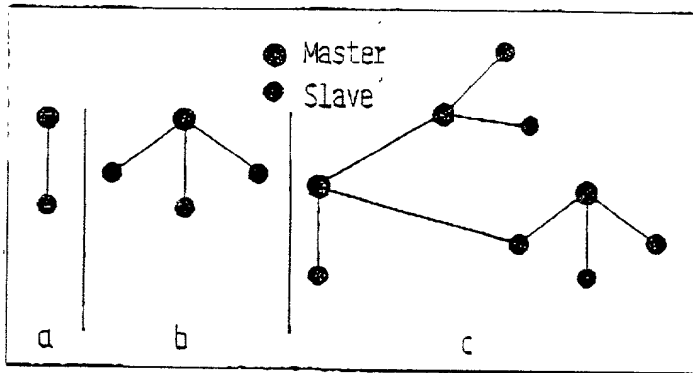


FIG. 1

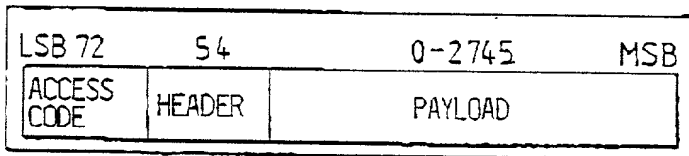


FIG. 2

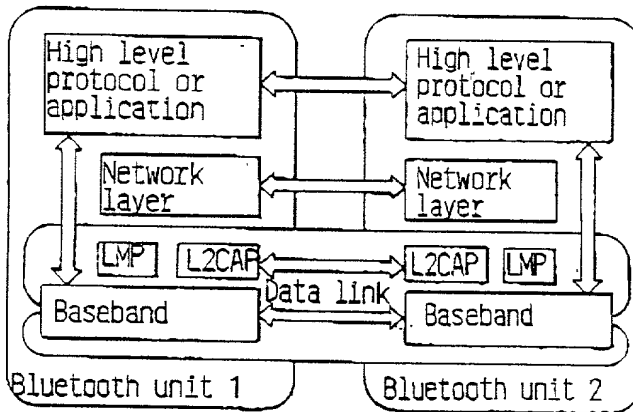


FIG. 3

009027 926260

LSB										MSB	
34	24	2	2	2	8	16	24	3	26	3	
Parity bits	LAP	Unde-fined	SR	SP	UAP	NAP	Class of device	AM_ADDR	CLK	Page scan mode	

FIG.4

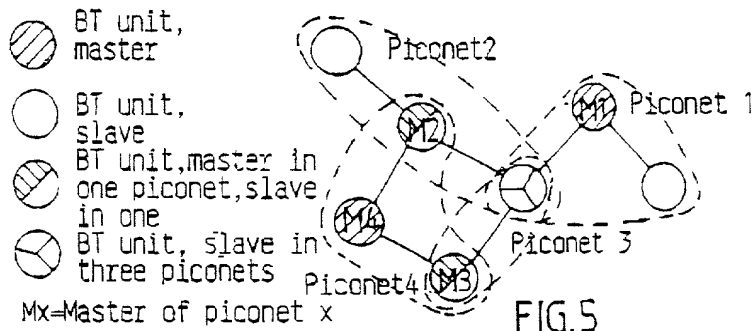


FIG.5

Suboptimal piconet and scatternet structure.




FIG.6

Optimal piconet structure.

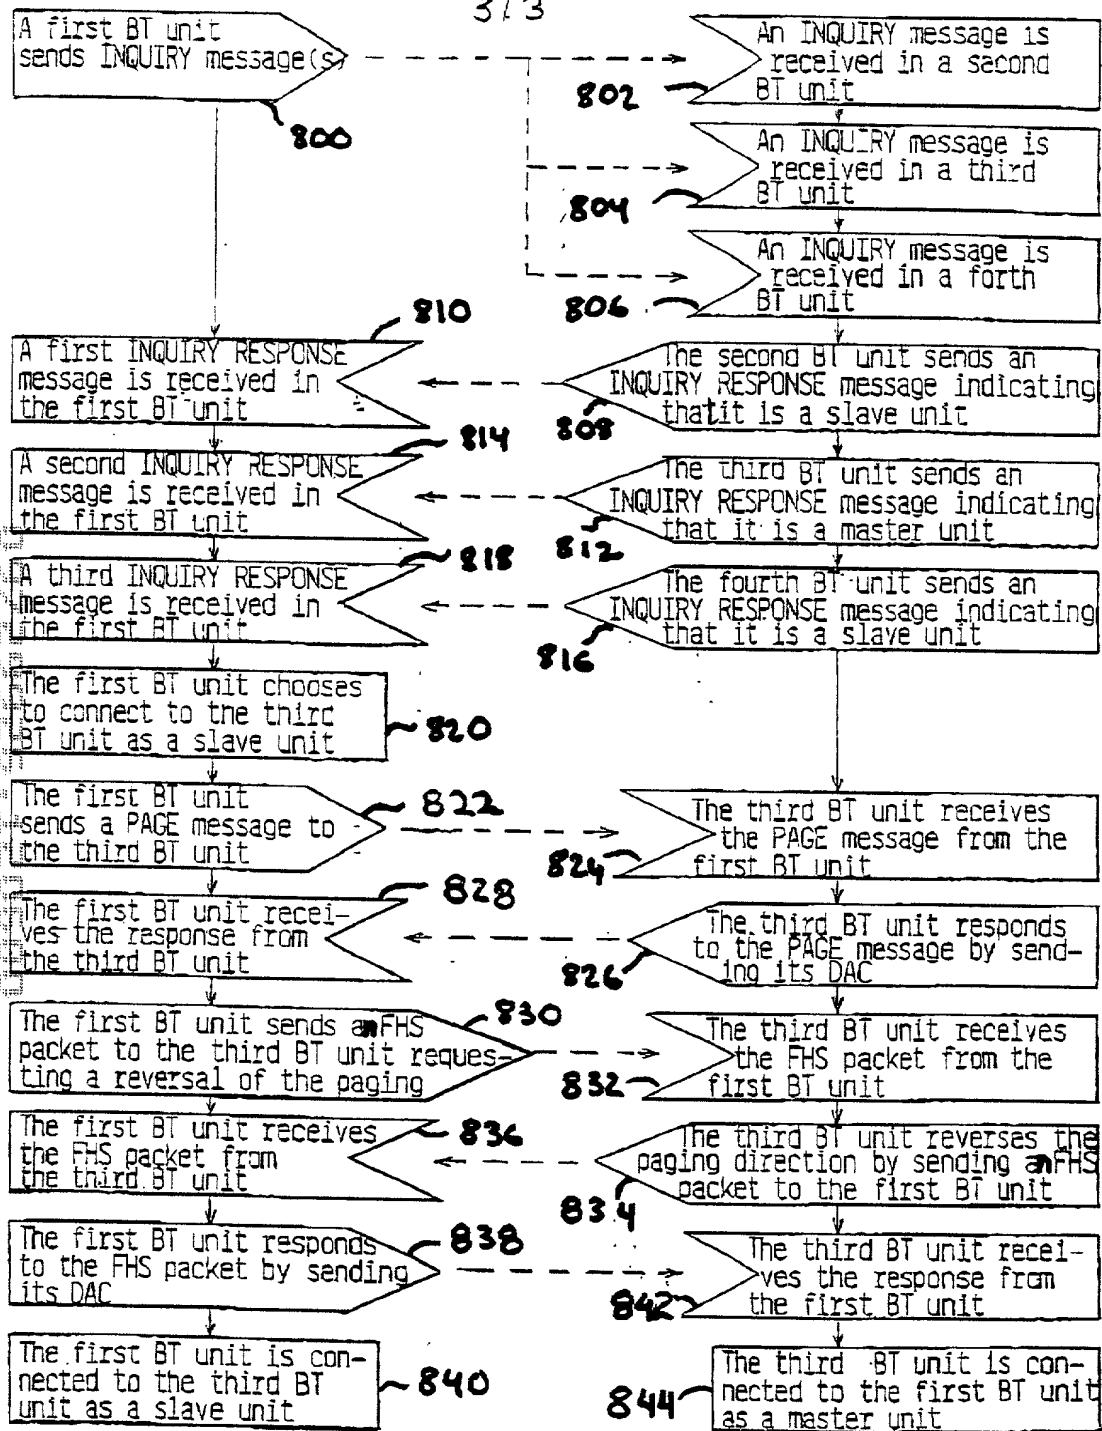


FIG. 7